


SLIDING DOORS




Decorratti
Architectural Components





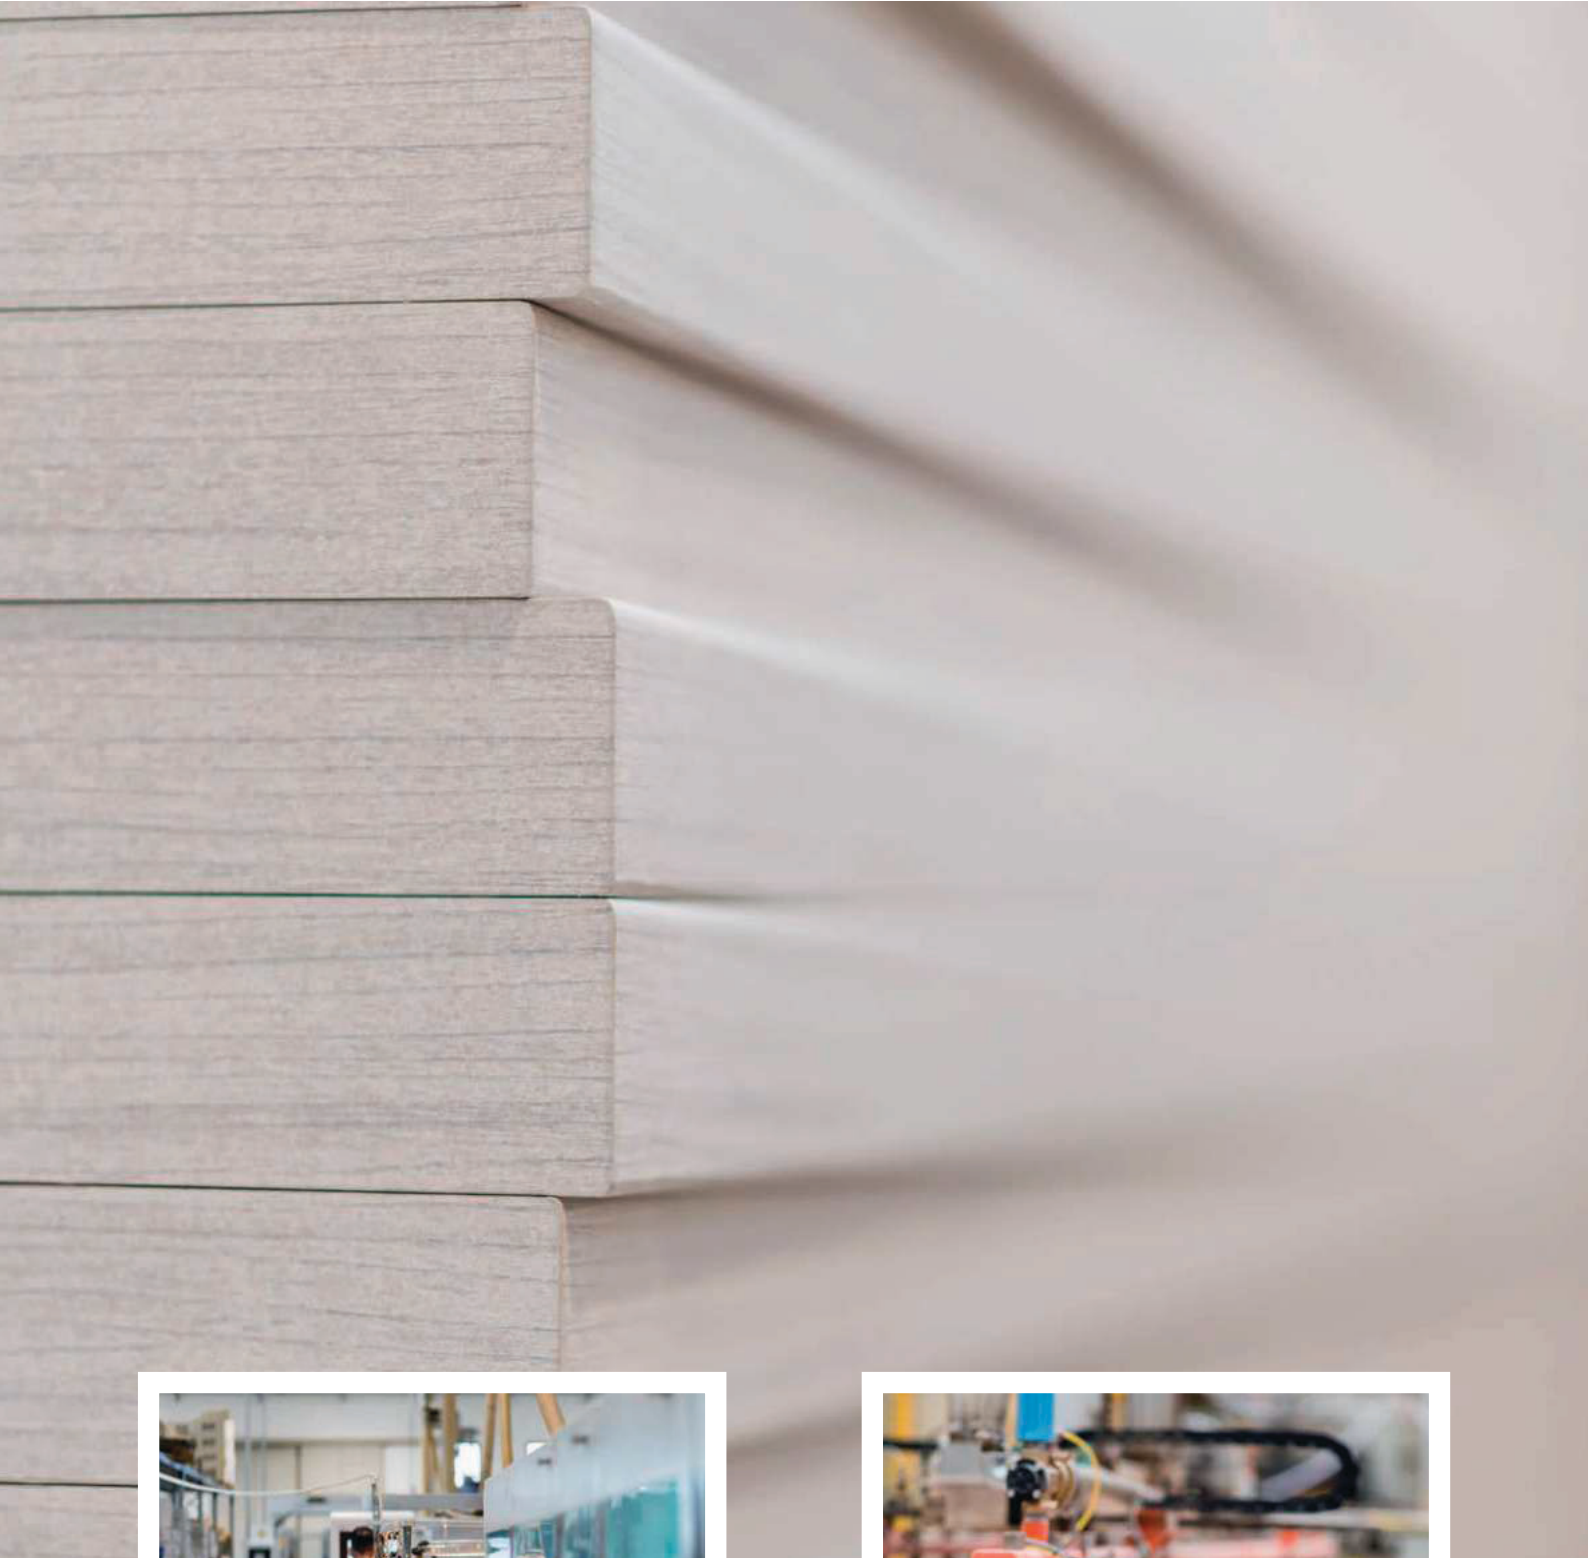



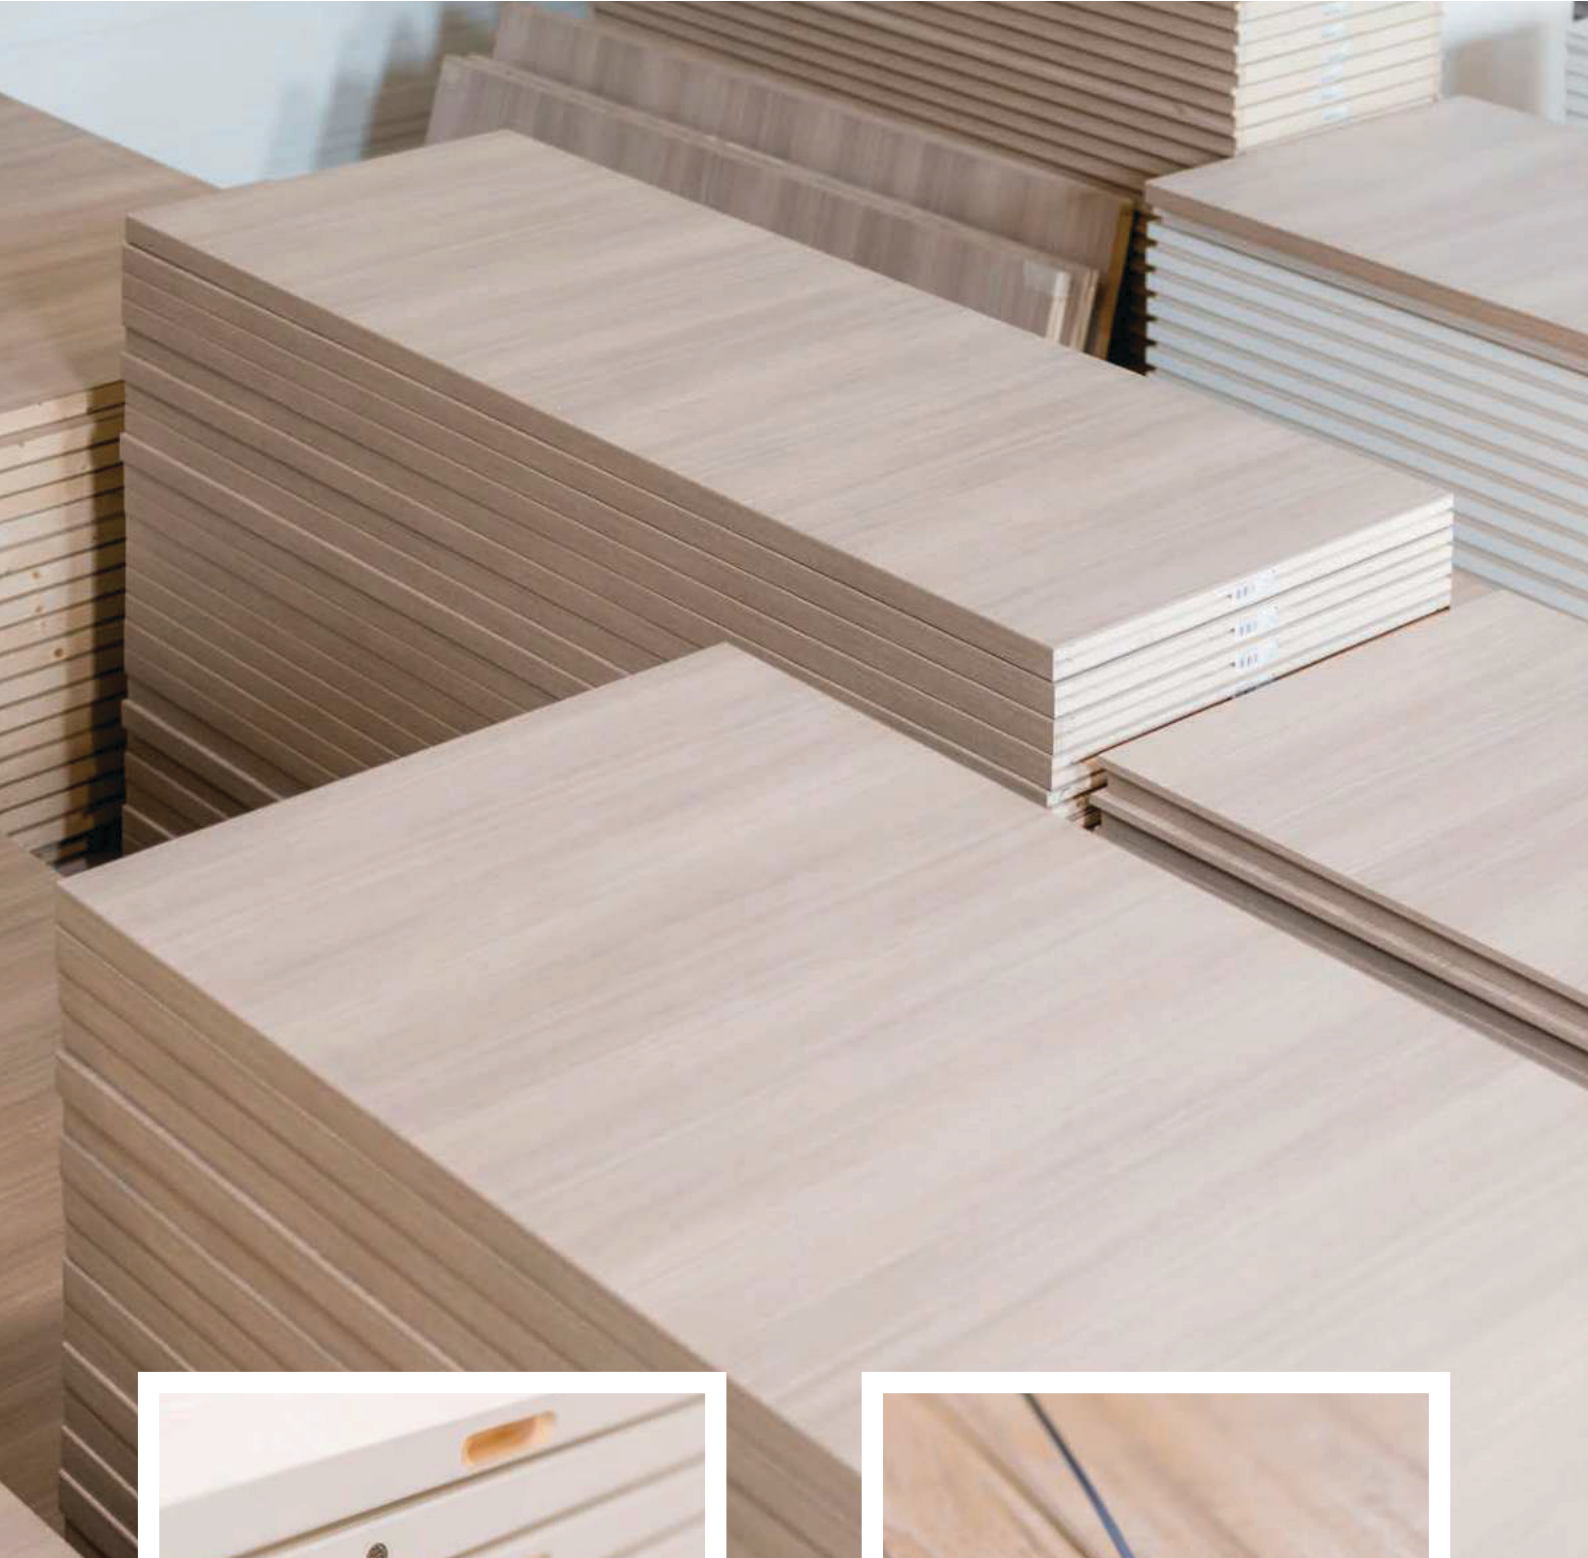







TUS ENIGMAS
LOS MIOS
SEAN DE LA MA
SE ANNI MIEDEN DESER
MILITARI CON L'AVVICINO SPA...
STABILIZAZIONE S











GAMMA COLORI \ COLOR RANGE \ GAMME DE COULEURS \ RANGO DE COLORES \ ЦВЕТОВАЯ ГАММА

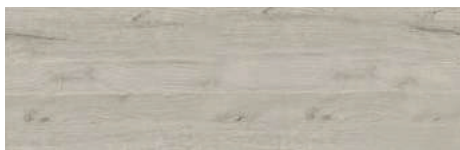


QUERCIA CALDERONE 4D



BIANCO SCULTURA

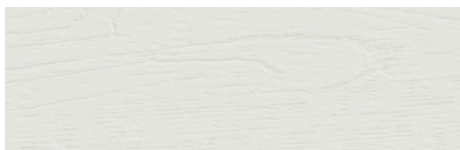


QUERCIA MAIELLA 4D



BIANCO



QUERCIA GRAN SASSO 4D

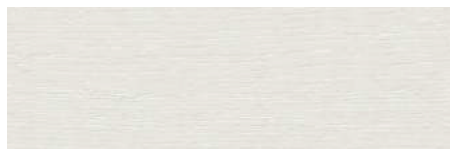


BIANCO FRASSINO



QUERCIA LAGA 4D



ROVERE CITY 3D

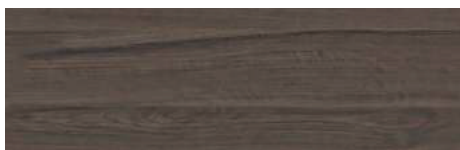

CANALETTO



ROVERE MOCACCINO 3D




OLMO ARTICO




ROVERE MOKA 3D



OLMO BALTICO

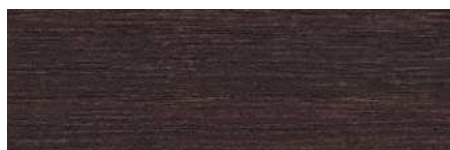


WENGÉ

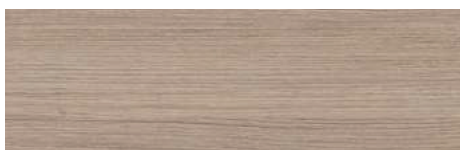

OLMO DESERTO



NOCE NAZIONALE

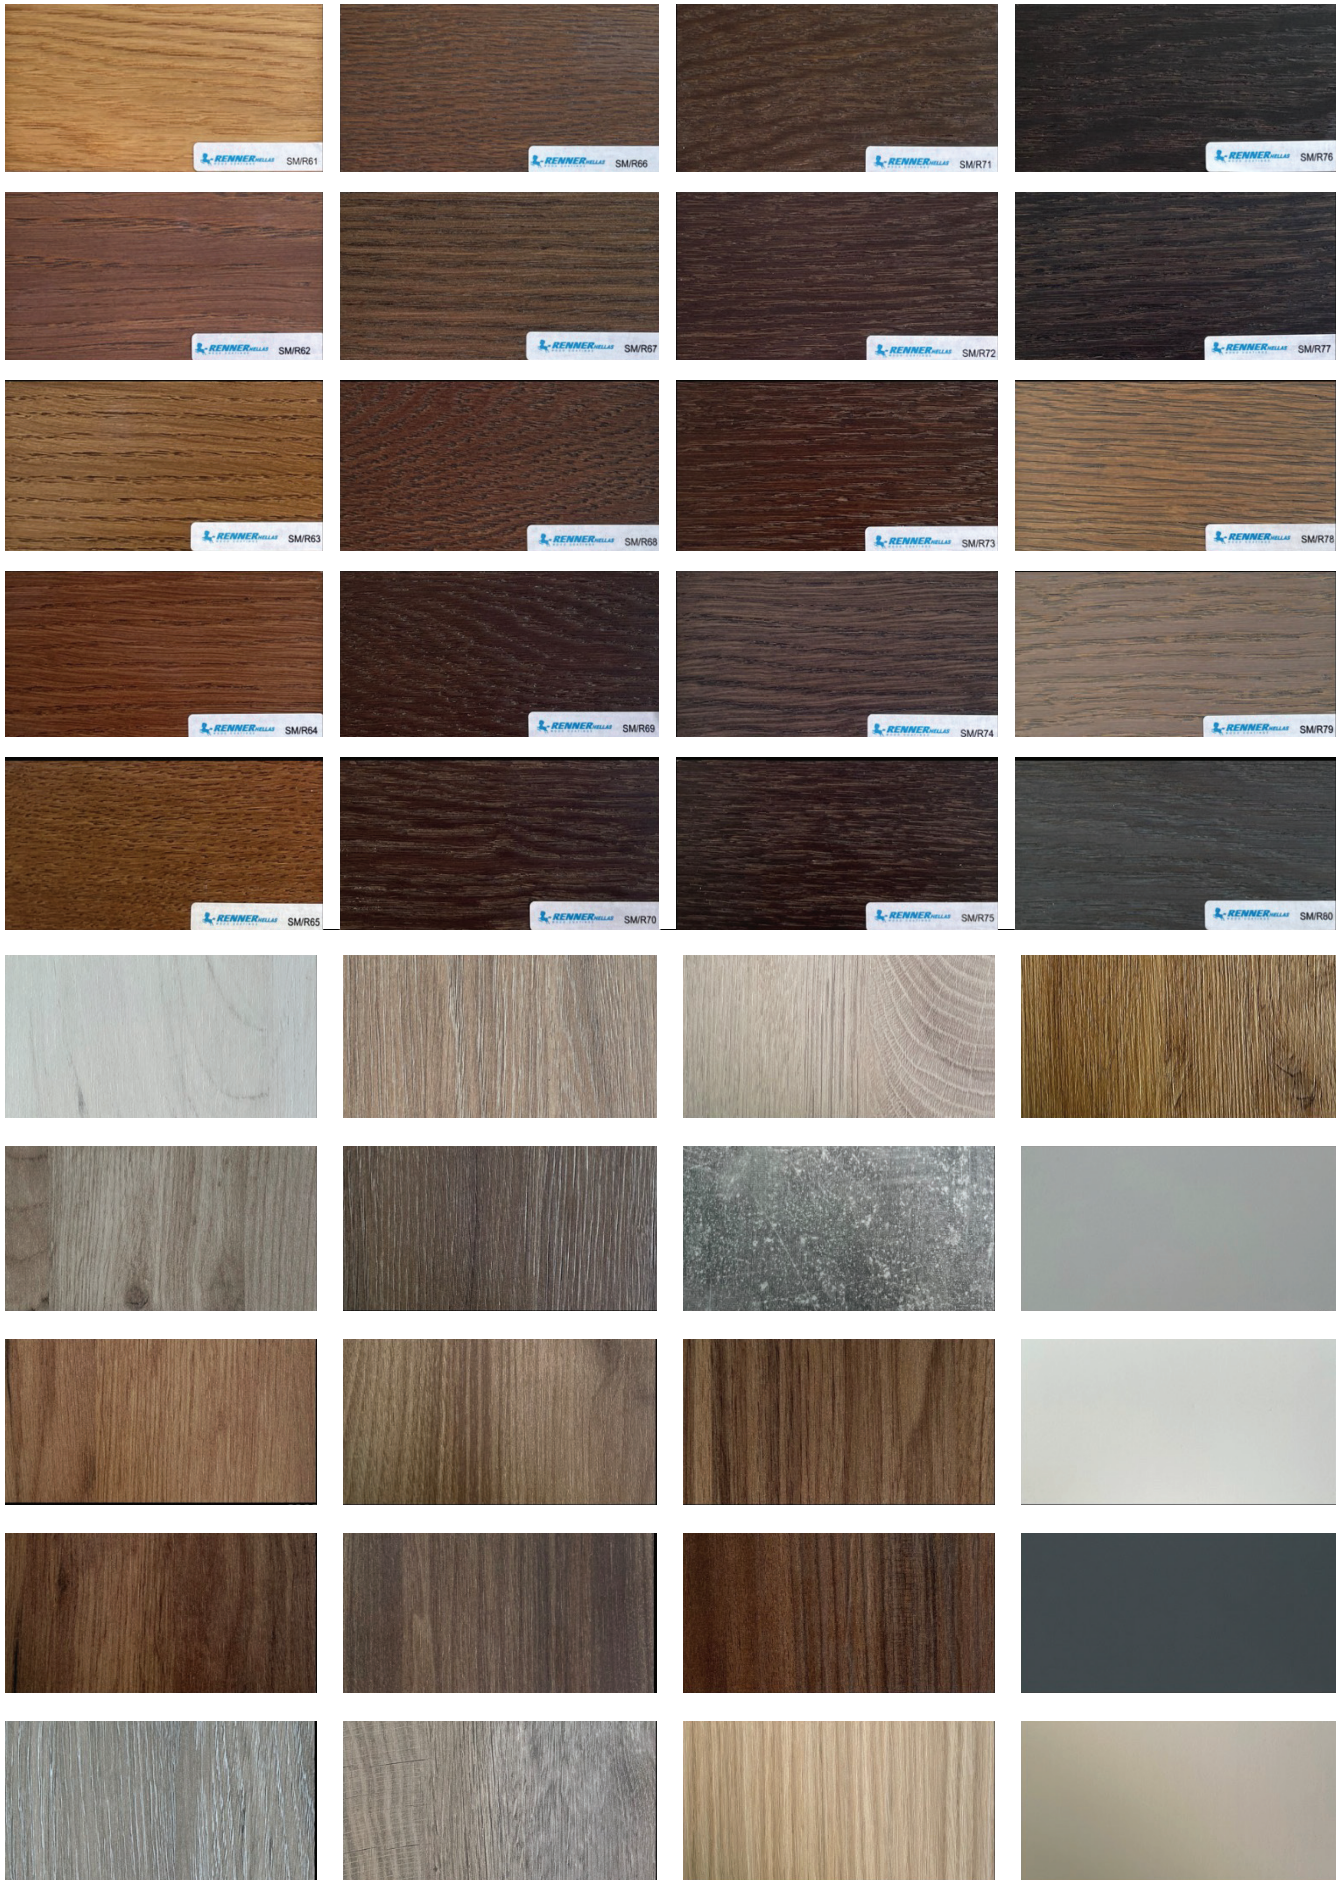



OWNER MANUAL - WALL OPENINGS


Supplier is responsible for inspecting Wall Opening Conditions or Dimensions. It is the owner/contractor responsibility to prepare wall openings to the size or conditions agreed and required for product installation. We recommend using the following check list while preparing wall opening. Please share with contractor, interior designer, architect, or any professional hired and responsible for the construction of your residence.

PLEASE VERIFY EACH ONE OF THESE AND CHECK IT OFF THE LIST BEFORE SCHEDULING INSTALLATION.




Dimensions

Make sure wall opening corresponds with door schedule dimensions and shop drawings.

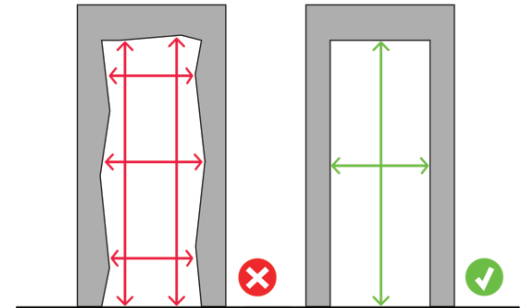


Wall Alignment

If door is between two intersecting walls, make sure wall are aligned (Interior/ Exterior)

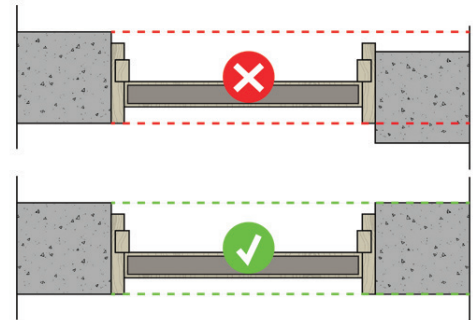


Crooked Wall

Uneven walls are usually a case of the wall opening being slightly on an angle. Make sure contractor leaves 90° walls on both sides.

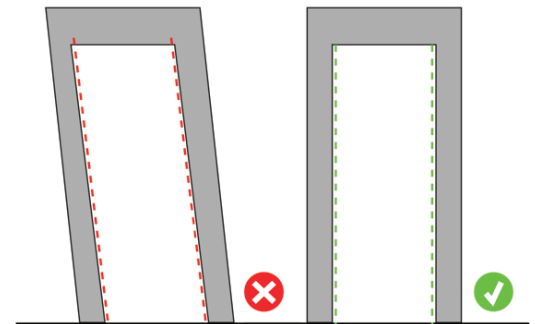

Wall Bumps "Belly"

This can often be found on concrete wall that have been smooth plastered unevenly. Wall must be completely flat to achieve desired aesthetics.

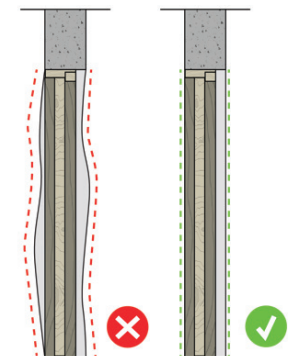

Decorratti
Architectural Components