


VERTICAL REVEAL





Decorratti
Architectural Components





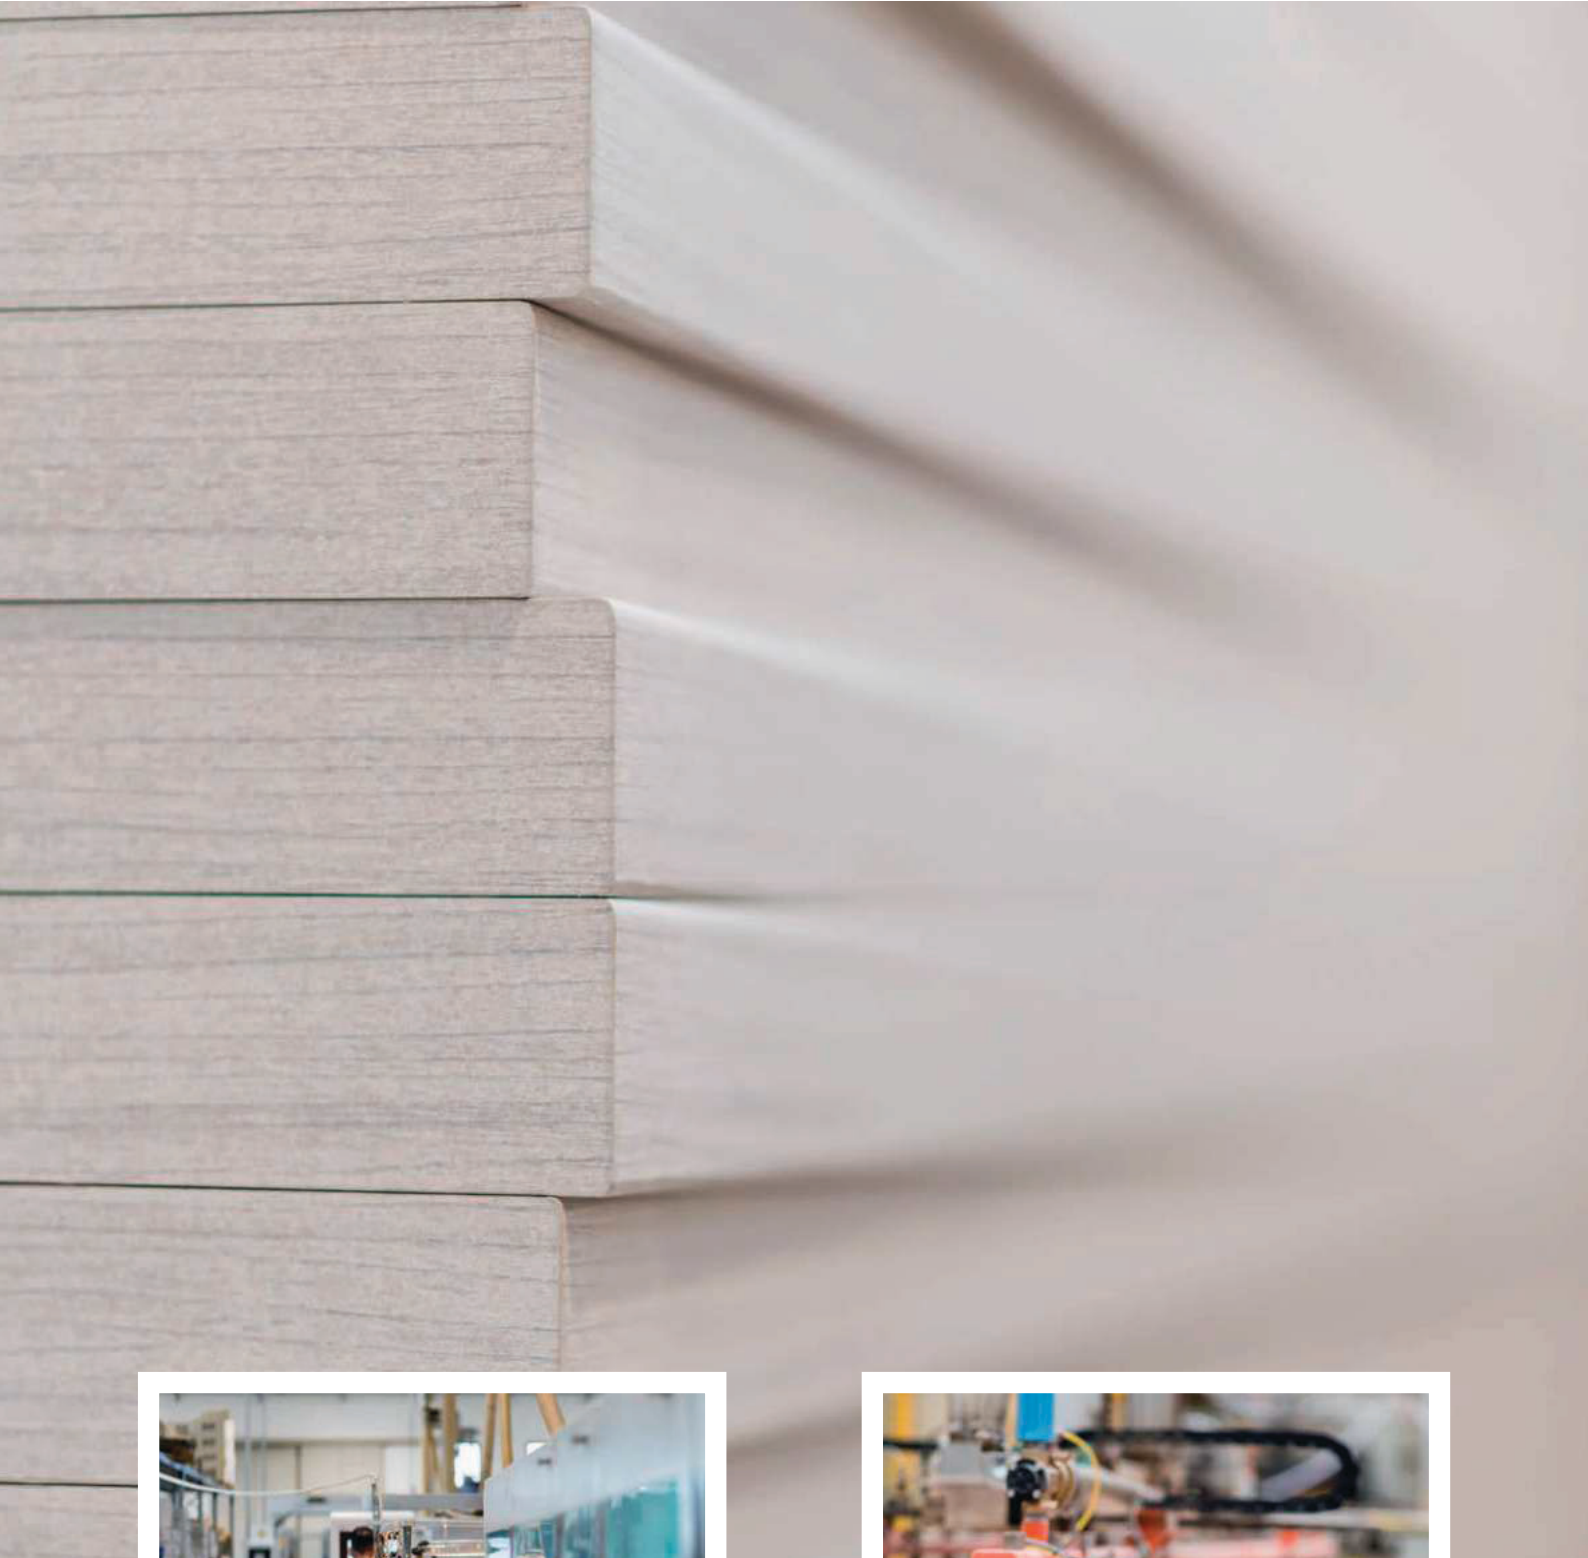



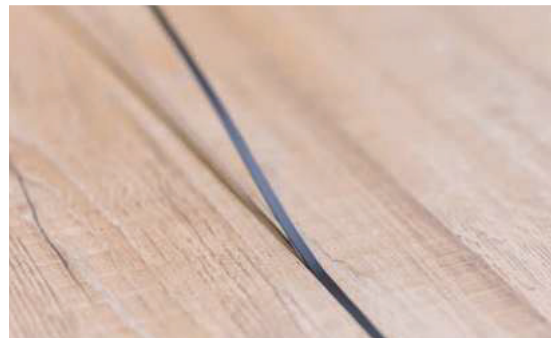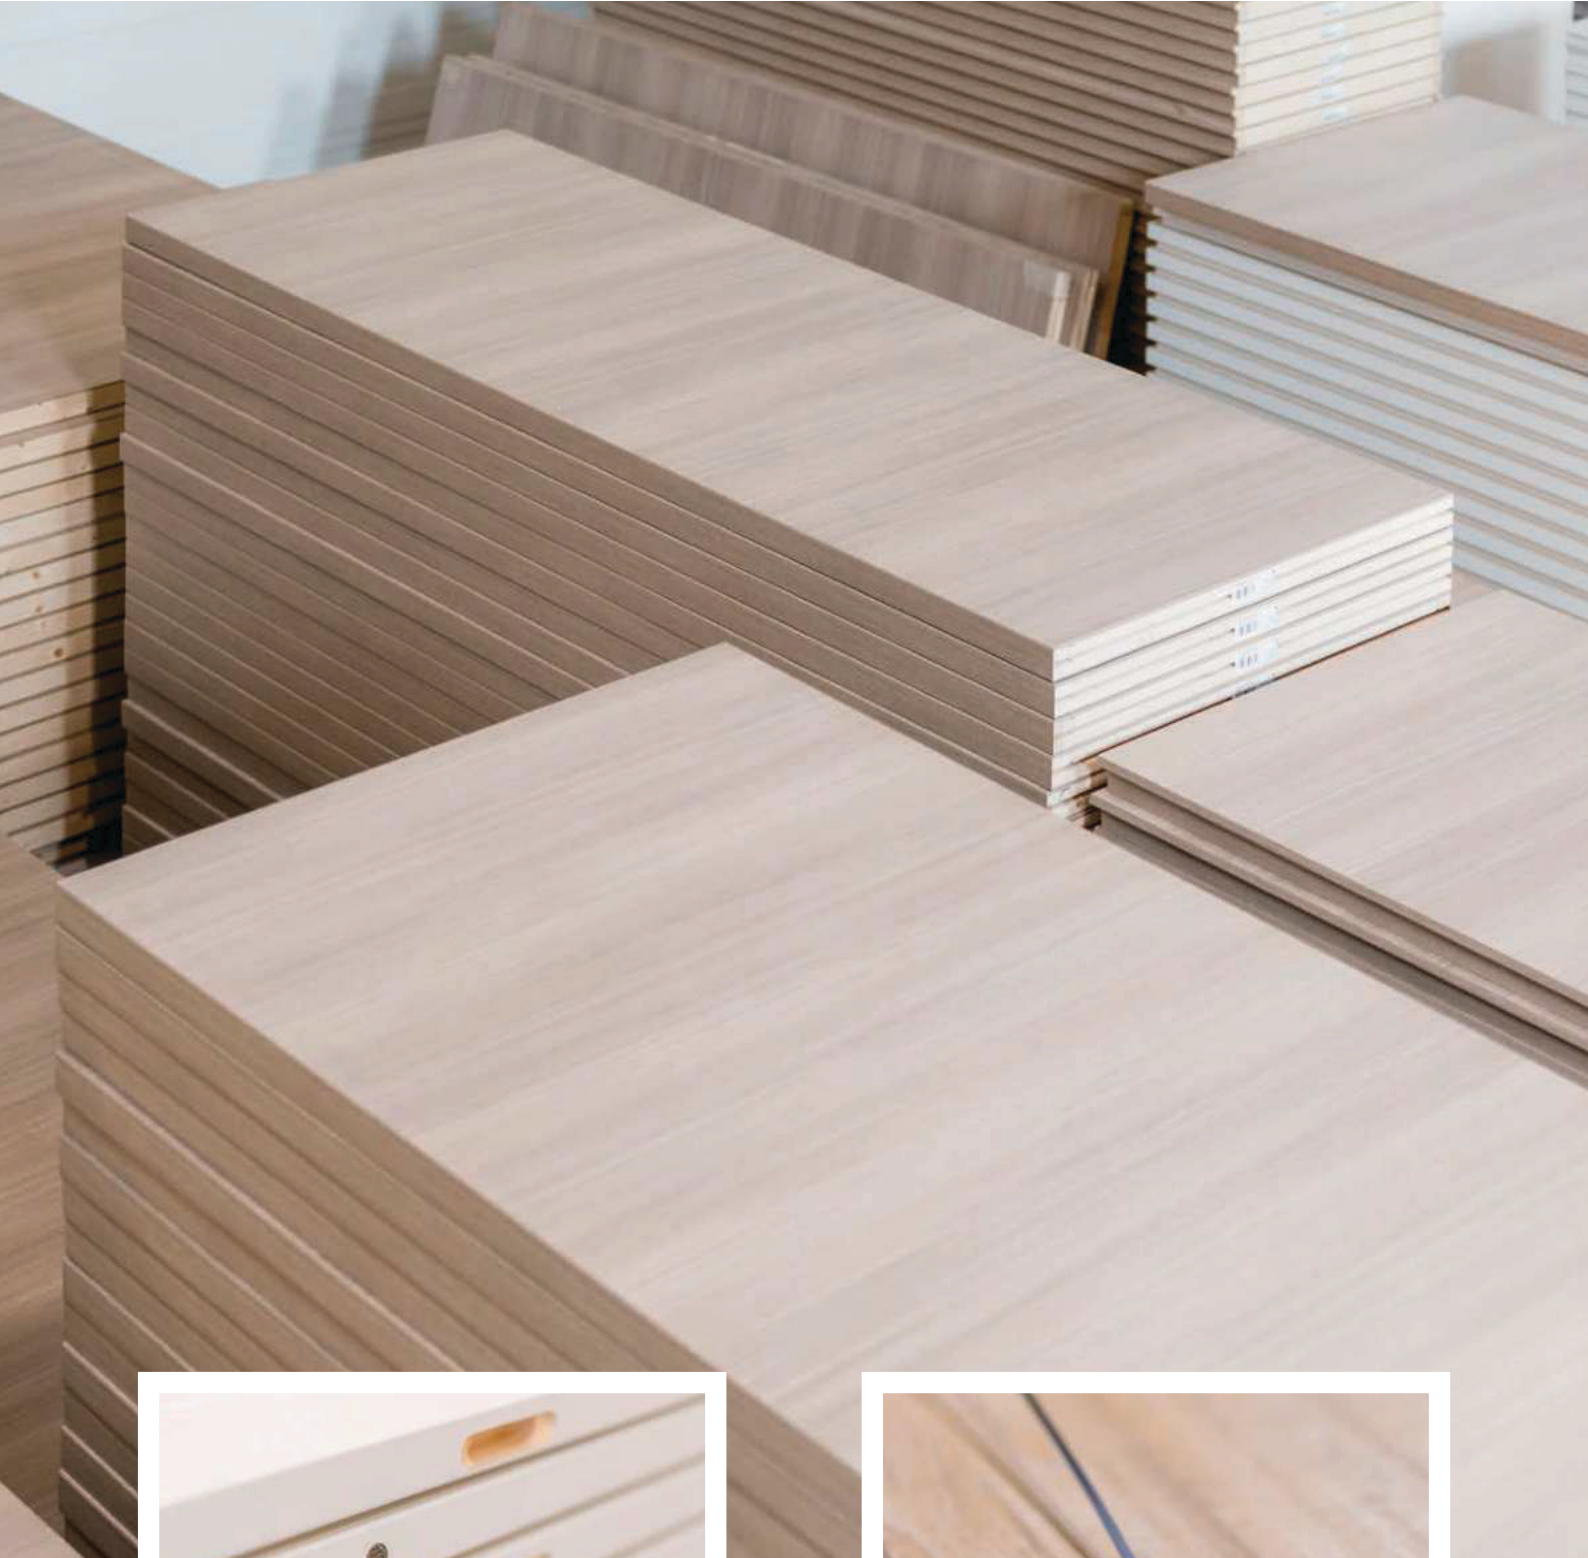
























MEETING ROOM







PORTA VERTICAL REVEAL

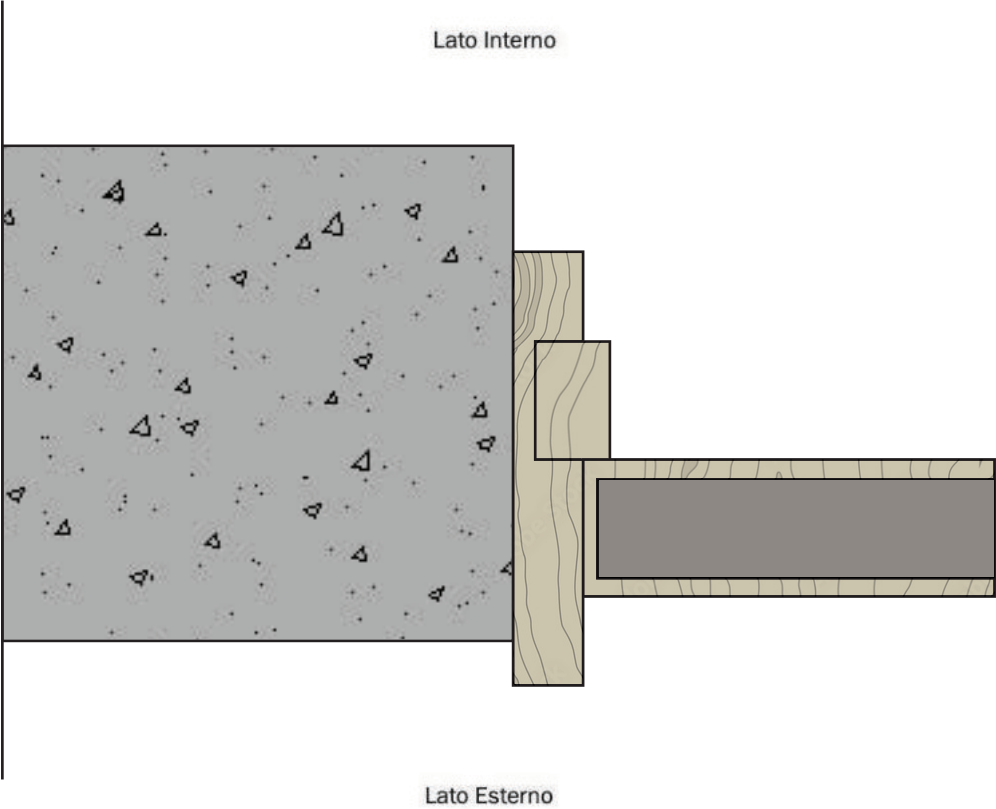

PORTA VERTICAL REVEAL

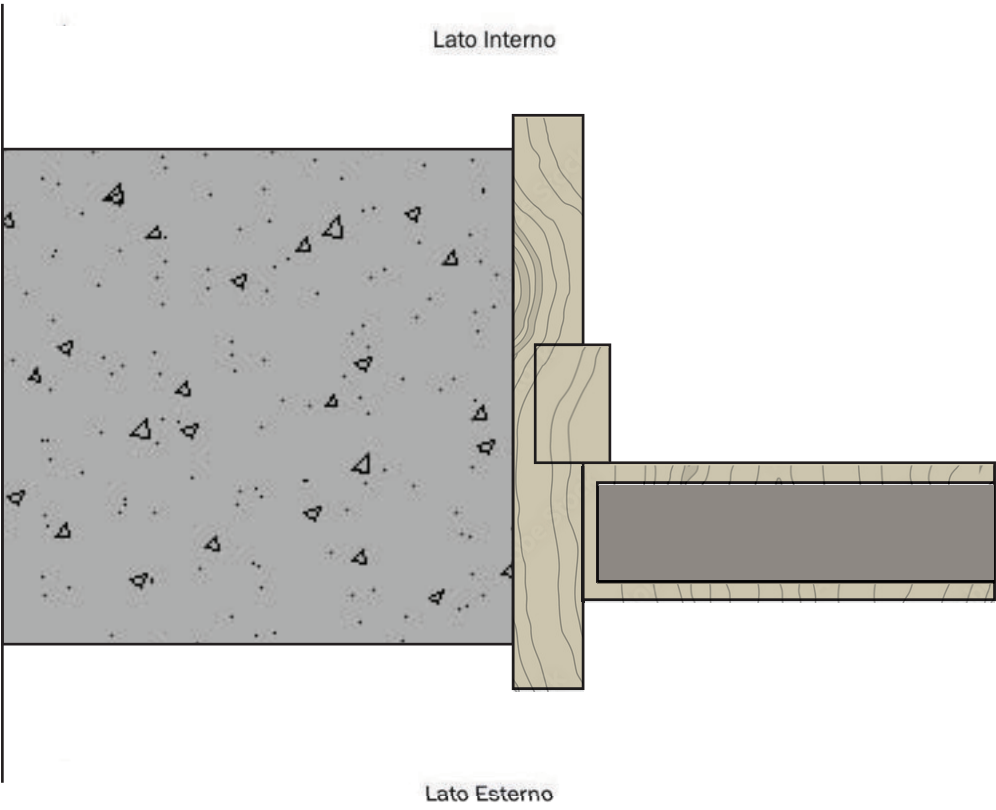

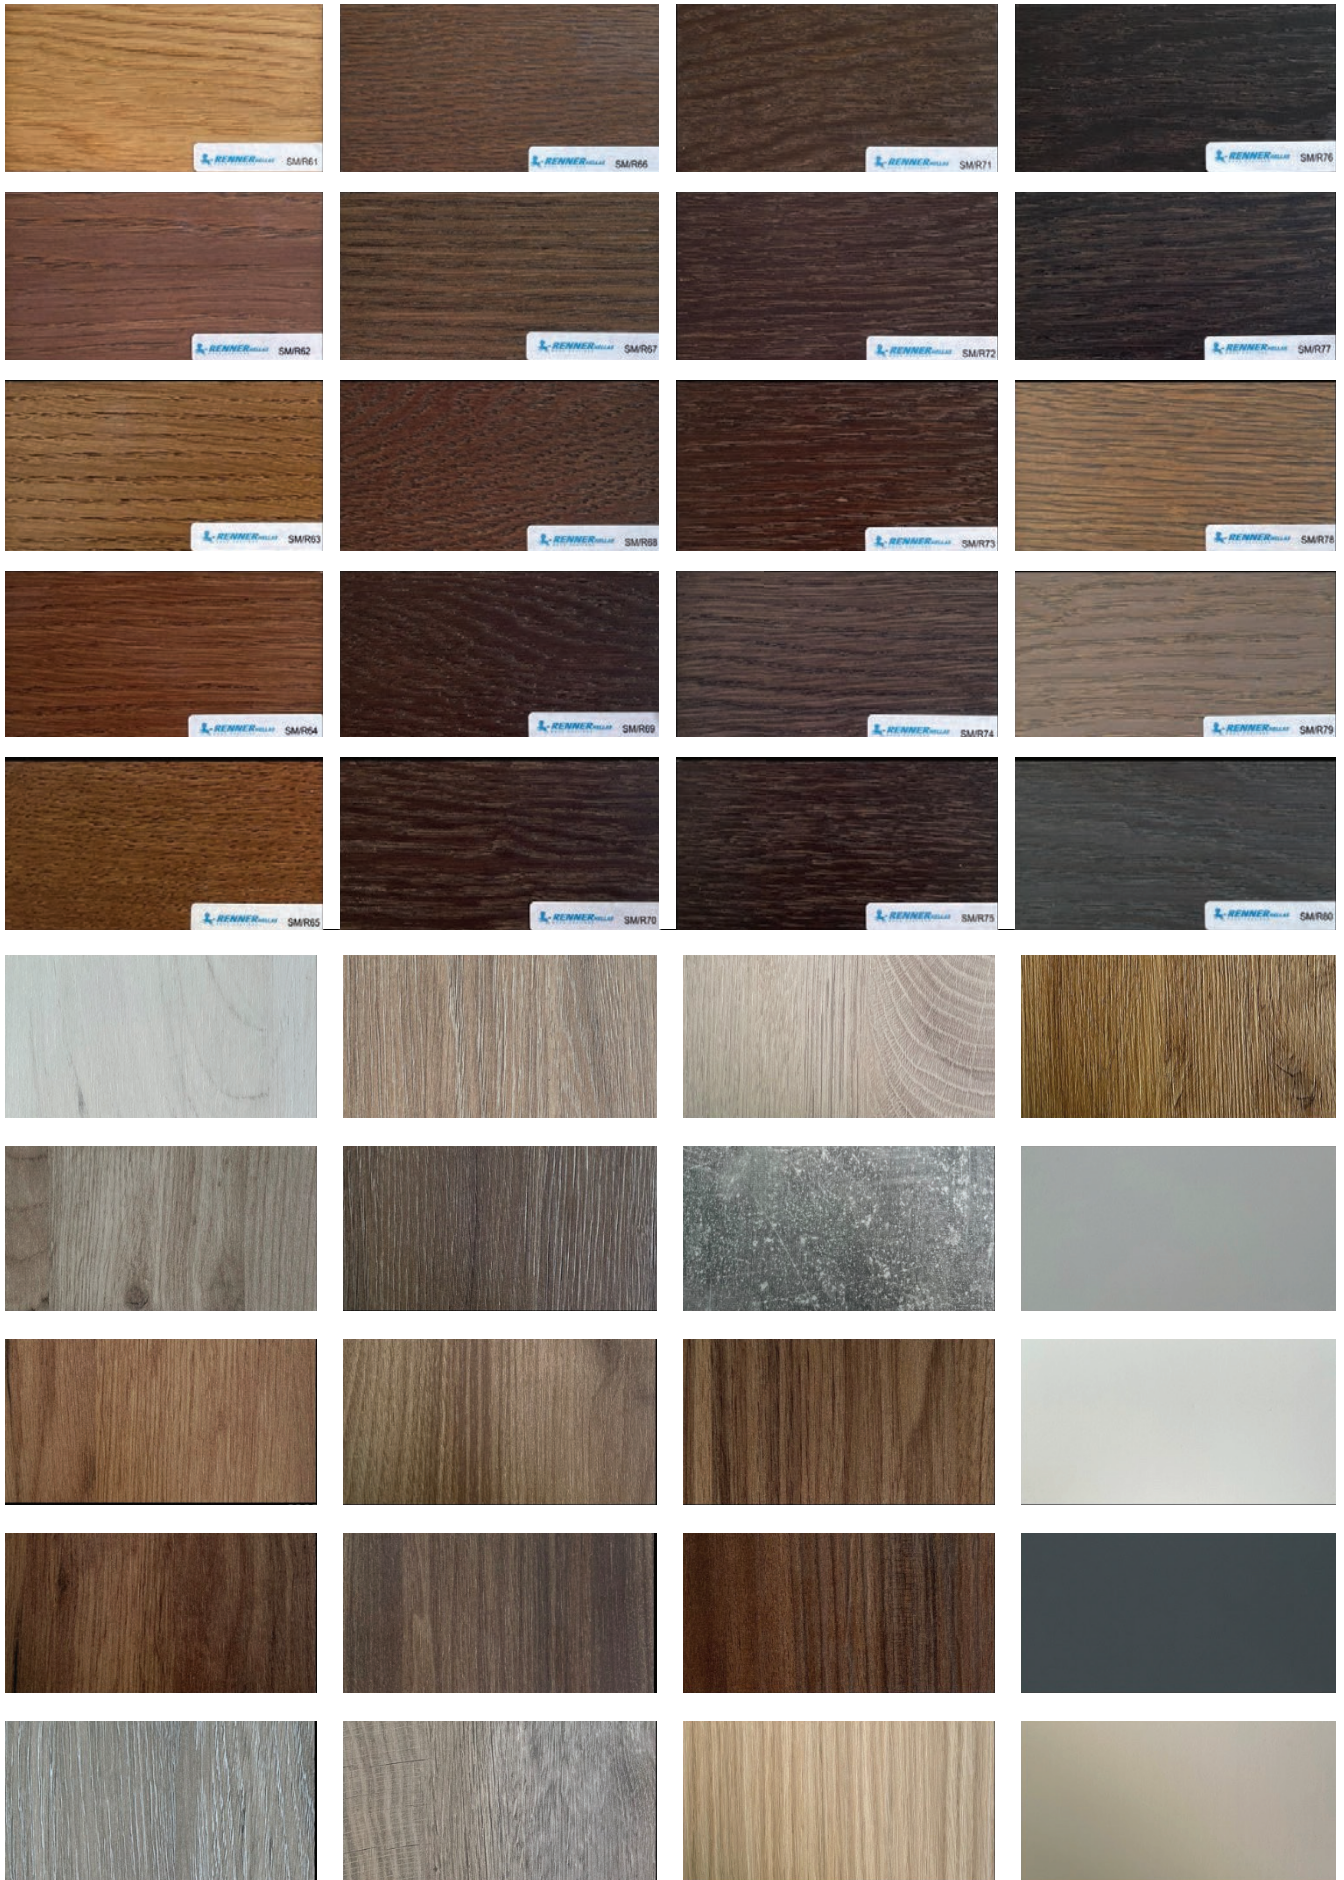



OWNER MANUAL - WALL OPENINGS


Supplier is responsible for inspecting Wall Opening Conditions or Dimensions. It is the owner/contractor responsibility to prepare wall openings to the size or conditions agreed and required for product installation. We recommend using the following check list while preparing wall opening. Please share with contractor, interior designer, architect, or any professional hired and responsible for the construction of your residence.

PLEASE VERIFY EACH ONE OF THESE AND CHECK IT OFF THE LIST BEFORE SCHEDULING INSTALLATION.




Dimensions

Make sure wall opening corresponds with door schedule dimensions and shop drawings.

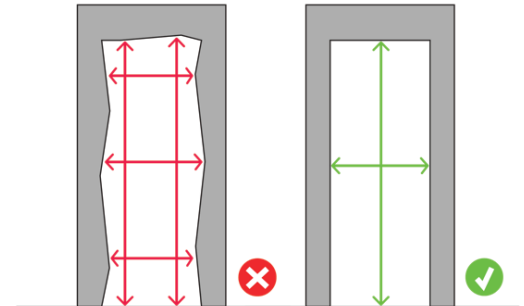


Wall Alignment

If door is between two intersecting walls, make sure wall are aligned (Interior/ Exterior)

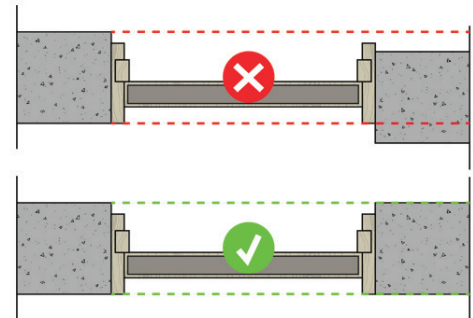

Crooked Wall

Uneven walls are usually a case of the wall opening being slightly on an angle. Make sure contractor leaves 90° walls on both sides.

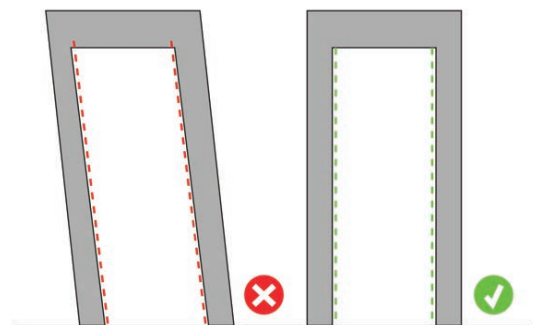

Wall Bumps "Belly"

This can often be found on concrete wall that have been smooth plastered unevenly. Wall must be completely flat to achieve desired aesthetics.

